


- a. Automatic setback thermostats are required for central furnaces and heat pumps.
- b. Duct insulation must have a minimum R value of 4.2.
- c. Doors and windows between conditioned and unconditioned spaces must be weather stripped.
- d. Caulking and sealants must be used in the building envelope at all exterior wall, ceiling, floor, and floor and wall joints, openings in walls, ceilings, floor joists, and roof eaves, and at other openings in the building envelope.
- e. Automatic back-draft dampers must be installed in exhaust duct system.

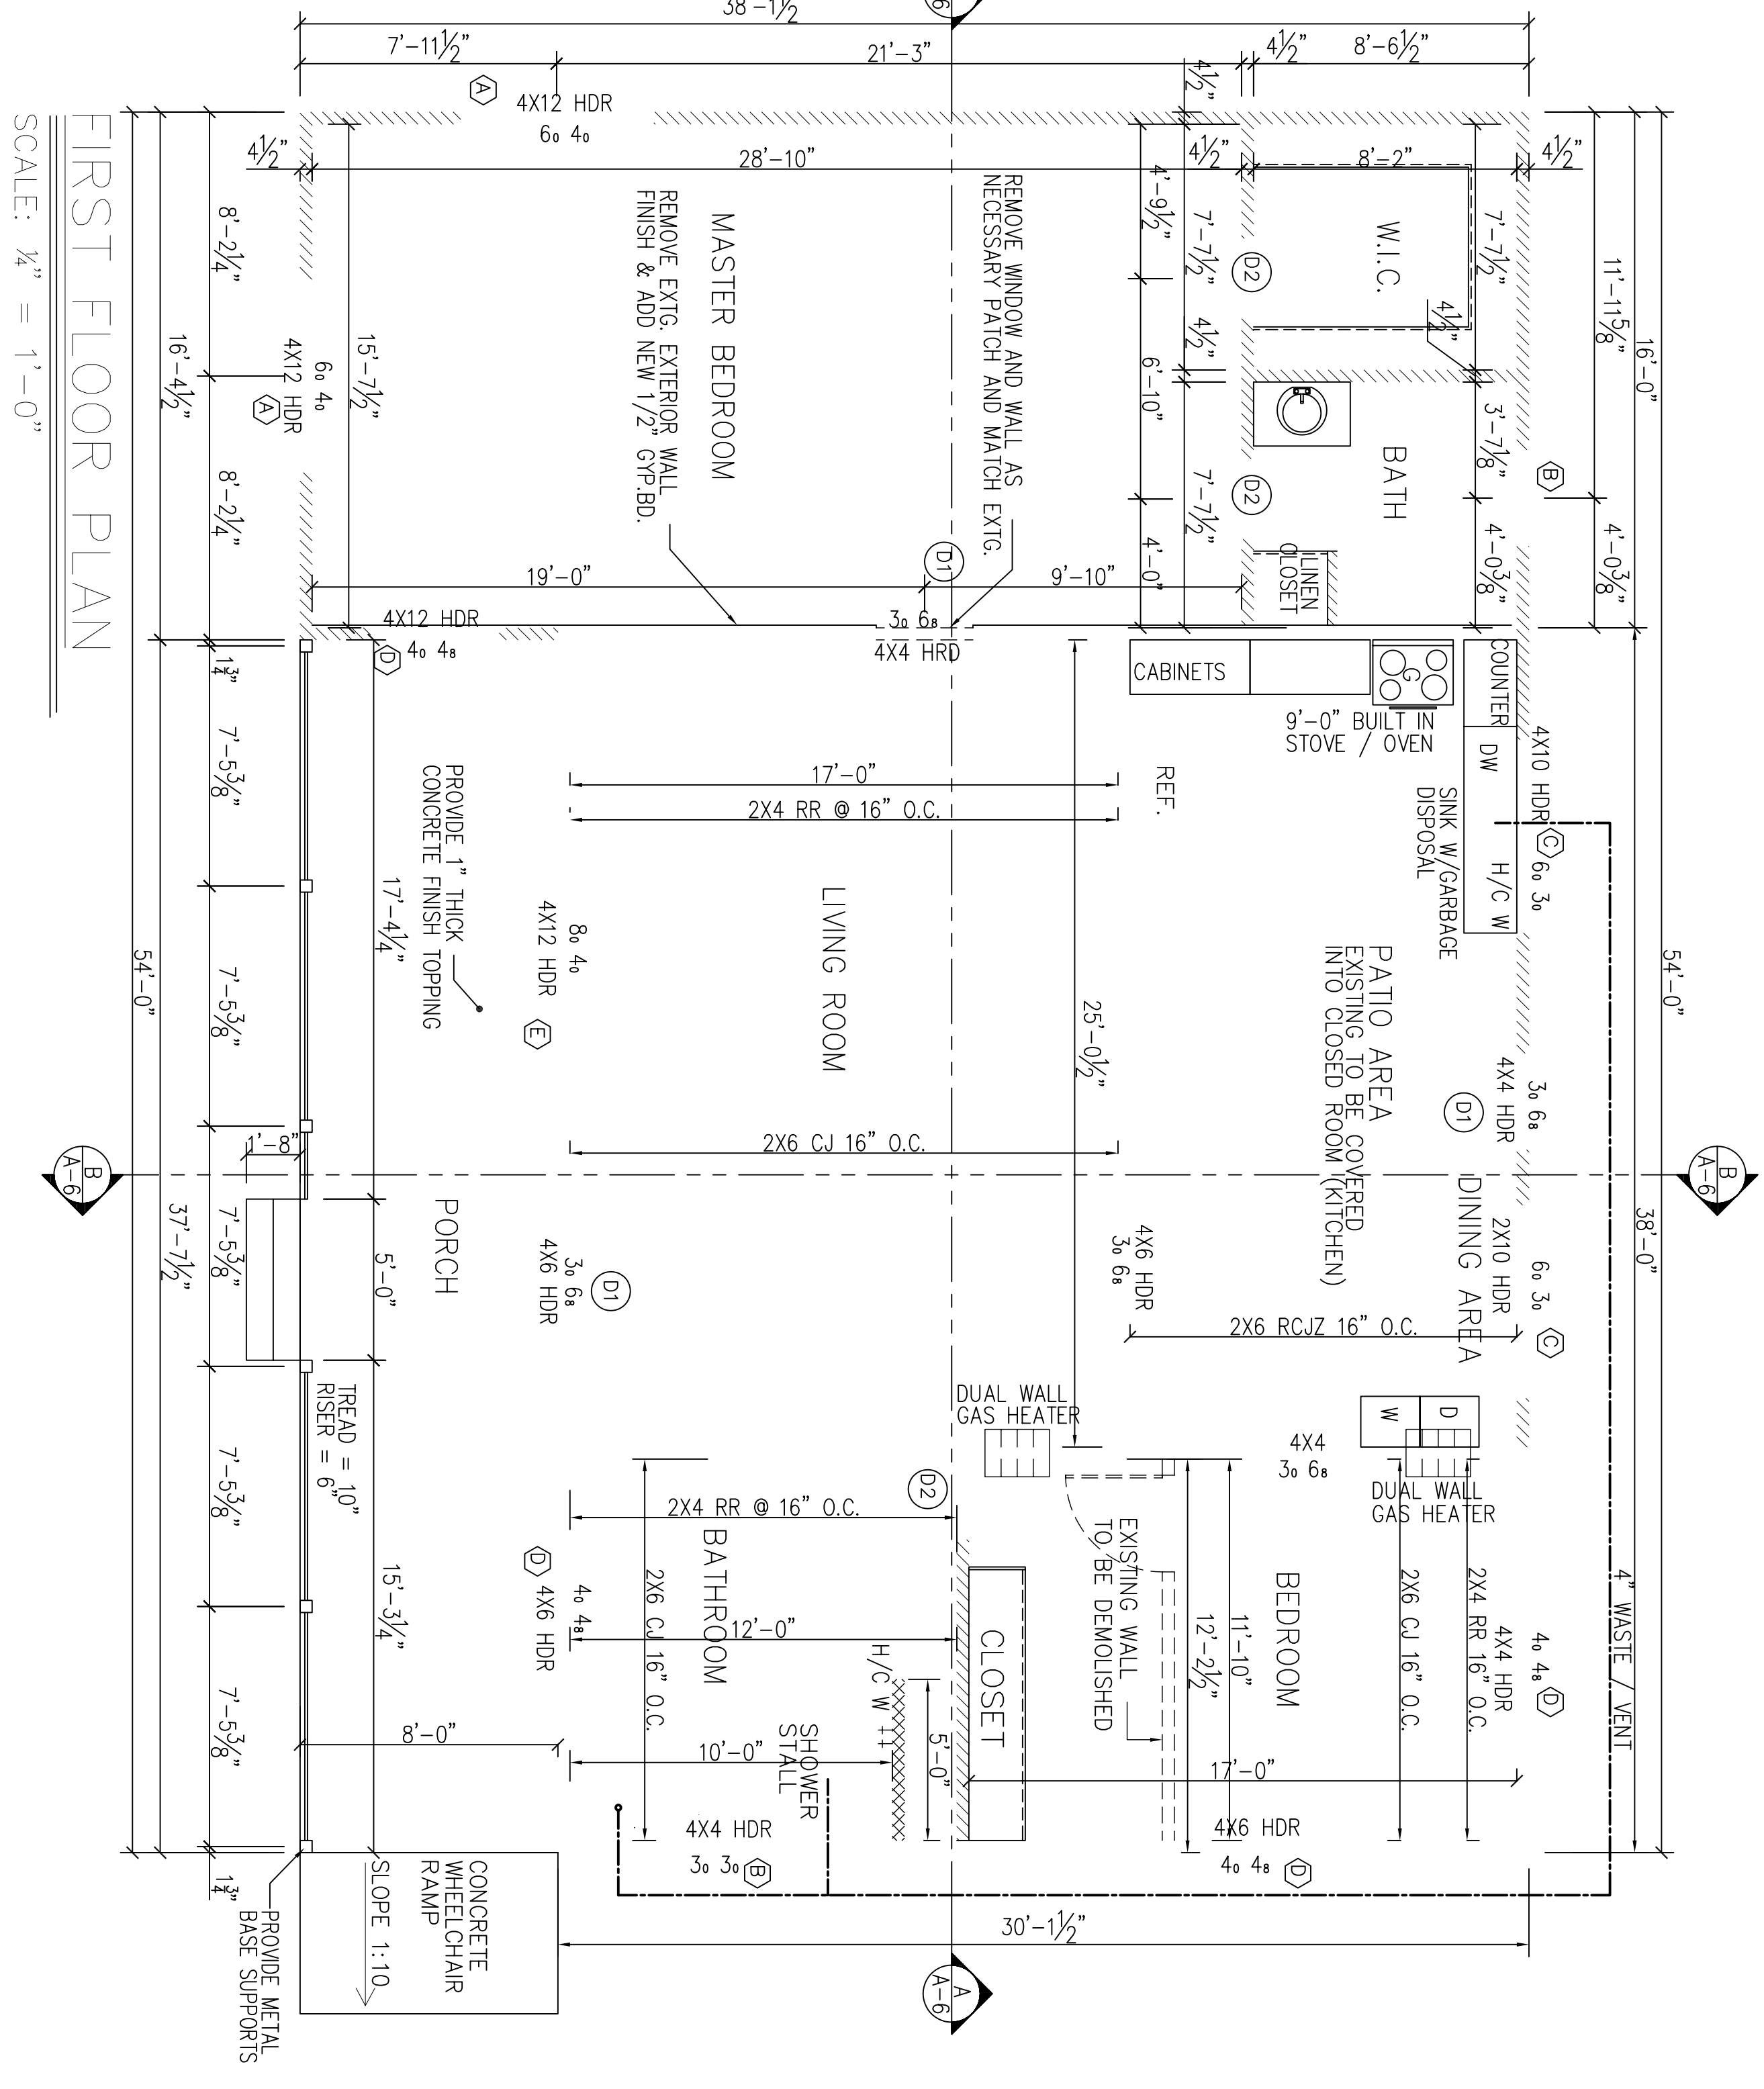

EXISTING AREA OF PLAN =	1434 SQ.FT.
PROPOSED ADDITION =	624 SQ.FT.
TOTAL AREA =	2058 SQ.FT.

DOOR SCHEDULE			
MARK	UNIT SIZE	TYPE	QUANTITY
(D1)	36X80	SOLID WOOD	3
(D2)	30X80	SOLID WOOD	3

WINDOW SCHEDULE			
MARK	UNIT SIZE	TYPE	QUANTITY
(A)	72 X 48	CASEMENT	2
(B)	36 X 36	CASEMENT	2
(C)	72 X 36	CASEMENT	2
(D)	48 X 56	CASEMENT	4
(E)	96 X 48	CASEMENT	1

----- NON BEARING WALL
 ----- NEW BEARING WALL
 ----- EXTG. BEARING WALL